

JC08 Rec'd PCT/PTO 29 JAN 2001

SUBSTITUTE FORM PTO-1390

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER  
11777-678001

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If Known, see 37 CFR 1.5)  
**09/744726**

INTERNATIONAL APPLICATION NO.  
PCT/TR99/00034

INTERNATIONAL FILING DATE  
29 July 1999

PRIORITY DATE CLAIMED  
29 July 1998

TITLE OF INVENTION  
COMPOSITION FOR USE IN A DISHWASHING MACHINE

APPLICANT(S) FOR DO/EO/US  
Guido WAESCHENBACH, Ralf WIEDEMANN, Enric CARBONELL, Ludwig HERTLING and Natasha WOLF

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (UNSIGNED).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern other documents or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

☐  
☐  
☐  
☐  
☐

**CERTIFICATE OF MAILING BY EXPRESS MAIL**


Express Mail Label No **EF 353 815031US**

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington D.C. 20231

January 29, 2001  
Date of Deposit

Francisco Robles  
Signature

Francisco Robles  
Typed Name of Person Signing

U.S. APPLICATION NO. <b>09/744,266</b>		INTERNATIONAL APPLICATION NO. PCT/TR99/00034		ATTORNEY'S DOCKET NUMBER 11777-678001	
17. <input type="checkbox"/> The following fees are submitted: <b>Basic National Fee ( 37 CFR 1.492(a)(1)-(5) ):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1000</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710</b>  International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690</b>  International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100</b>  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS</b> PTO USE ONLY	
				\$1,000.00	
Surcharge of <b>\$130</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	56 - 20 =	36	x \$18	\$648.00	
Independent Claims	2 - 3 =	0	x \$80	\$0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270	\$270.00	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$1,918.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
<b>SUBTOTAL =</b>				\$1,918.00	
Processing fee of <b>\$130</b> for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$0.00	
<b>TOTAL NATIONAL FEE =</b>				\$1,918.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00 per property</b> +				\$0.00	
<b>TOTAL FEES ENCLOSED =</b>				\$1,918.00	
				<b>Amount to be refunded:</b>	\$
				<b>Charged:</b>	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$1,918.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 06-1050 in the amount of \$0.00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.					
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO:					
Frederick H. Rabin FISH & RICHARDSON P.C. 45 Rockefeller Plaza, Suite 2800 New York, NY 10111 (212) 765-5070 phone (212) 258-2291 facsimile Date: <u>29 January 2001</u>			 SIGNATURE: _____ NAME: Frederick H. Rabin REGISTRATION NUMBER: 24,488		

JC02 Rec'd PCT/PTO 29 JAN 2001

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Guido WAESCHENBACH

Int'l Appln.: PCT/TR99/00034

Int'l Date : 29 July 1999

Title : COMPOSITION FOR USE IN A DISHWASHING MACHINE

**Box: PCT**

Commissioner for Patents

Washington, D.C. 20231

FIRST PRELIMINARY AMENDMENT

Prior to examination, please amend the application as follows:

In the Claims:

Cancel claims 1-49 and replace with the following new claims 50-98:

50. A composition for use in a dishwashing machine, said composition comprising

a basic composition (2; 3; 2') which essentially deploys its function in the main cleaning cycle of the dishwashing machine,

at least one particle (6; 6'; 6'') having

at least one core (8; 8'; 8'') incorporating at least one substance essentially deploying its function in the clear rinsing cycle of the dishwashing machine, and


## CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No EF353815031US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231

January 29, 2001

Date of Deposit



Signature

Francisco Robles

Typed or Printed Name of Person Signing Certificate

an envelope (9; 9'; 9") substantially completely surrounding each  
core, said envelope incorporating at least one compound whose  
solubility increases with decreasing concentration of a specific  
compound in the medium surrounding the particle,

and

an agent to prevent substantial dissolution of the envelope or substantial  
detachment of the envelope from the core (8; 8') or cores (8") at the start of  
the clear rinsing cycle.

51. A composition according to claim 50, in which the concentration of the  
specific compound in the medium surrounding the particle or particles is, until the  
start of the clear rinsing cycle, sufficiently high to prevent substantial dissolution of the  
envelope or substantial detachment of the envelope from the core (8; 8') or cores (8").

52. A composition according to claim 51, in which each particle is coated with  
a substance which, substantially independently of the concentration of the specific  
compound in the surrounding medium, dissolves or separates from the particle during the  
main rinsing cycle of the dishwashing machine.

53. A composition according to claim 50, in which the basic composition is in  
the form of a tablet (1; 1').

54. A composition according to claim 53, in which the particle or particles are  
so placed in or on the tablet that the concentration of the specific compound in the  
medium surrounding the particle or particles is sufficiently high so as to prevent  
substantial dissolution of the envelope or substantial detachment of the envelope from the  
core or cores until the tablet is substantially dissolved.

55. A composition according to claim 54, in which the particle or particles (6) are received in at least one cavity (4, 5) of the tablet (1) completely surrounded by the basic composition (2, 3).

56. A composition according to claim 55, in which each cavity contains one or more particles which, alone or together, have substantially the same volume as the cavity.

57. A composition according to claim 55, in which one or more cavities has a larger volume than the particle or all the particles contained in the particular cavity.

58. A composition according to claim 57, in which the particle or particles are loosely arranged in the interior of the cavity.

59. A composition according to claim 57, in which the particle or particles are fixed in the interior of the cavity.

60. A composition according to claim 59, in which the particle or particles are fixed by an adhesive.

61. A composition according to claim 55, in which the cavity is substantially centrally positioned in the interior of the tablet.

62. A composition according to claim 61, in which the tablet has a single substantially spherical cavity.

63. A composition according to claim 62, in which the cavity contains a single substantially spherical particle whose external diameter is smaller than the internal diameter of the cavity.

64. A composition according to claim 54, in which the particle or particles (6'; 6'') are received in at least one cavity (5) of the tablet (1'), which is only partly surrounded by the basic composition (2').

65. A composition according to claim 54, in which the particle or particles (6'; 6'') are received in a depression (4') in one of the surfaces (11') of the tablet (1').

66. A composition according to claim 64 or 65, in which the particle or particles are placed in the cavity or depression in such a way that they do not project over the surface or surfaces of the tablet.

67. A composition according to claim 66, in which the cavity or depression contains only a single particle whose volume and shape in the vicinity of the cavity or depression substantially coincide with the volume and shape of the cavity or depression and substantially completely fills said cavity or depression.

68. A composition according to claim 67, in which the cavity or depression has a substantially circular cross-sectional surface parallel to one of the surfaces to which it opens or in which it is located.

69. A composition according to claim 68, in which the cavity or depression is open to the surface only to the extent that the particle or particles received therein cannot pass out of said cavity or depression.

70. A composition according to claim 69, in which the particle or particles are loosely arranged in the cavity or depression.

71. A composition according to claim 69, in which the particle or particles are fixed in the cavity or depression.

72. A composition according to claim 71, in which the particle or particles are fixed by an adhesive (10').

73. A composition according to claim 50, in which the basic composition (2, 3; 2') incorporates a composition selected from the group consisting of a machine dishwashing agent composition, a water softener composition, a washing intensifier composition, and combinations thereof.

74. A composition according to claim 50, in which the envelope (9; 9'; 9'') incorporates at least one compound which (a), at the concentration of the specific compound at the end of the main cleaning cycle of the dishwashing machine, is insoluble or is only slightly soluble and (b), at the concentration of the specific compound in the clear rinsing cycle, has an adequate solubility to ensure that it is so significantly dissolved or detached from the core or cores that a complete or partial escape of the core material into the medium of the clear rinsing cycle is possible.

75. A composition according to claim 74, in which the solubility of the compound increases with decreasing OH<sup>-</sup> ionic concentration in the surrounding medium.

76. A composition according to claim 75 which, at a pH-value above 10, the compound has no or only a limited solubility and, at a pH-value below 9, an adequate solubility to ensure that, in the clear rinsing cycle it is so significantly dissolved or detached from the core or cores that a complete or partial escape of the core material into the medium of the clear rinsing cycle is possible.

77. A composition according to claim 75, in which the compound comprises a polymer.

78. A composition according to claim 77, in which the compound comprises a pH-sensitive polymer incorporating at least one repeat unit having at least one basic function which does not form part of the polymer backbone chain.


79. A composition according to claim 78, in which the repeat unit is based on a compound selected from the group consisting of vinyl alcohol derivatives, acrylates and alkyl acrylates having said basic function.

80. A composition according to claim 78, in which the polymer is a carbohydrate functionalized with said basic function.

81. A composition according to claim 78, in which the basic function is an amine.

82. A composition according to claim 81, in which the amine is a secondary or tertiary amine.

83. A composition according to claim 81, in which the repeat unit is based on a compound of formula III:

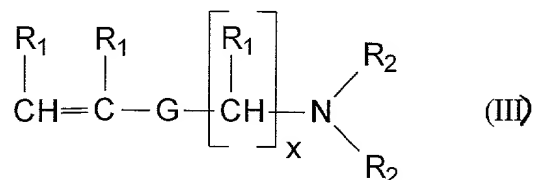

5

in which

G is a linking group selected from  $-COO-$ ,  $-OCO-$ ,  $-CONH-$ ,  $-NHCO-$ ,  $-NHCONH-$ ,  $-NHCOO-$ ,  $-OCONH-$  or  $-OCOO-$ ,


each  $R_1$  is hydrogen or an alkyl group with 1 to 3 carbon atoms,



10 each R<sub>2</sub> is hydrogen or an alkyl group with 1 to 5 carbon atoms, and

x is an integer from 1 to 6.

84. A composition according to claim 83, in which the repeat unit is based on a compound of formula IV:

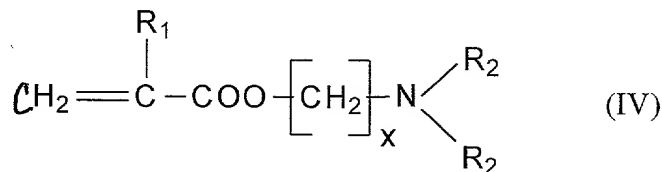

in which

R<sub>1</sub> is hydrogen or an alkyl group with 1 to 3 carbon atoms,

each R<sub>2</sub> is hydrogen or an alkyl group with 1 to 5 carbon atoms, and

x is an integer from 1 to 6.

85. A composition according to claim 78, in which the basic function is an imine.

86. A composition according to claim 78, in which the basic function is a basic aromatic N-containing group.

87. A composition according to claim 86, in which the basic function is a pyridine group.

88. A composition according to claim 86, in which the basic function is an imidazole group.

89. A composition according to claim 80, in which the polymer is derived from chitosan.

90. A composition according to claim 75, in which the composition incorporates  $\kappa$ -carrageenan.

91. A composition according to claim 50, in which the core or cores incorporate a material selected from the group consisting of surfactants, antibacterial compositions, silver protection agents, fragrances, bleaches, disinfectants, odour masking agents, anti-coating agents, enzymes, and combinations thereof.

92. A composition according to claim 91, in which the core (8; 8') or at least part of the cores (8'') is in the form of an encapsulated liquid.

93. A composition according to claim 92, in which the encapsulated liquid is contained in a gelatin capsule.

94. A composition according to claim 91, in which the core (8; 8') or at least a part of the cores (8'') is in solid form.

95. A composition according to claim 50, in which the core (8; 8') or at least a part of the cores (8'') has a melting point higher than 35°C.

96. A composition according to claim 95, in which the core or at least a part of the cores has a melting point between 55° and 70°C.

97. A process for washing dishes in a dishwashing machine, which comprises introducing into said dishwashing machine a composition comprising  
a basic composition (2; 3; 2') which essentially deploys its function in the main cleaning cycle of the dishwashing machine,

5 at least one particle (6; 6'; 6'') having

at least one core (8; 8'; 8'') incorporating at least one substance  
essentially deploying its function in the clear rinsing cycle of the  
dishwashing machine, and

10 an envelope (9; 9'; 9'') substantially completely surrounding each  
core, said envelope incorporating at least one compound whose  
solubility increases with decreasing concentration of a specific  
compound in the medium surrounding the particle,

and

15 an agent to prevent substantial dissolution of the envelope or substantial  
detachment of the envelope from the core (8; 8') or cores (8'') at the start of  
the clear rinsing cycle.

20 98. A process according to claim 97, which comprises the additional step of  
introducing into said dishwashing machine an additional dishwashing agent.

Applicant : Guido WAESCHBACH  
Int'l Appln.: PCT/TR99/00034  
Int'l Date : 29 July 1999  
Page : 10


Attorney's Dock. No.: 11777-678001 / 10581P4-US

REMARKS

The foregoing Amendment provides a new set of claims, all of which conform in substance to cancelled claims 1-49. This Amendment is not intended to substantially alter the scope of the claims.

Respectfully submitted,

Date: 29 January 2001



---

Frederick H. Rabin  
Reg. No. 24,488

Fish & Richardson P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111  
Telephone: (212) 765-5070  
Facsimile: (212) 258-2291

30039211 doc

09/744726

COMPOSITION FOR USE IN A DISHWASHING MACHINE

The present invention relates to a composition for use in a dishwashing machine and a process for the use thereof.

Although modern dishwashing machines in most cases have numerous different washing programs, which differ with regards to the duration and temperature of the individual washing cycles, all washing programs essentially consist of the following basic steps: preliminary washing cycle, main cleaning cycle, one or more intermediate rinsing cycles, a clear rinsing cycle and drying. Whereas the machine dishwashing agent for bringing about the cleaning action is added at the start of the main cleaning cycle, during the clear rinsing cycle special agents are used, e.g. clear rinsing agents. Clear rinsing agents are intended to ensure that when washing with water water droplets are not left behind on the washed articles which, after drying on, leave behind marks of substances dissolved/dispersed in the droplets.

These two functionalities, namely the cleaning action of the machine dishwashing agent and the described function of a clear rinsing agent, have hitherto been brought about using two separate charging or dosing devices and products charged or dosed at different points during the dishwashing cycle.

Apart from the use of clear rinsing agents, there is still a need for further substances evolving their activity during the washing or rinsing cycle, such as e.g. an antibacterial activity (e.g. cationic compounds or triclosan), silver protection agents (e.g. benzotriazole), an odorous action (fragrances, perfume), bleaching action/disinfection (chlorine bleaches), odour masking (e.g. polyvinylpyrrolidone), anti-coating agents and enzymes for additional purposes (e.g. lipase for removing grease and fat deposits in the dishwasher). However, modern dishwashers have no suitable charging systems for this purpose.

The aim of the present invention was consequently to combine in a single function the cleaning function and the function or functions of the substance or substances to be added during the clear rinsing cycle with a constant efficiency compared with the results obtainable with a separate charging or to permit the charging of substances other than the clear rinsing agent in the clear rinsing cycle.

DE-OS 20 65 153 and 20 07 413 disclose detergent blanks for use as detergents, in which it is inter alia provided that two components having a different functionality are combined. The structure comprises an enveloping shell, which is e.g. formed from two shell halves comprising a cleaning agent, as well as a cavity enclosed by the shells and which contains additives such as softeners, brighteners, etc.


09/744726

British patent 1 390 503 discloses a liquid detergent containing capsules, which are insoluble in the composition, but release their content if the composition is diluted with water. This objective is achieved in that the capsules are coated with a substance having a poor solubility in water solutions with high ionic strength, but becoming soluble if the ionic strength is reduced by dilution. It is pointed out that this procedure can be used to incorporate materials in the liquid cleaning agent, which are unstable in the latter or would produce an instability if added directly. It is also proposed that this procedure be used in order to delay the release of a specific substance. Reference is made to use in machine dishwashing agents and it is proposed for the encapsulation of tribromosalicylanilide in order to stabilize the latter. The encapsulated material is released within two minutes following the dilution of the cleaning agent with water, i.e. in the main cleaning cycle.

US patent 4,082,678 describes a fabric conditioning product comprising a closed container containing a releasable agent, which is used to make water-insoluble or non-dispersible an inner container located in the container and which is normally water-soluble or water-dispersible, the inner container containing a fabric conditioner. The inner container is made from a substance, whose solubility in water is highly dependent on the ionic strength or the pH-value of the medium and the agent used for rendering the inner container insoluble is an agent for controlling the pH-value or ionic strength.

Japanese patent applications KOKAI 60-141705, 61-28440, 61-28441, 61-28596, 61-28597 and 61-28598 describe processes for the production of pH-sensitive microcapsules for use in detergents. The pH-sensitive coating is a copolymer of the following monomers:

A) at least one basic monomer of formula I:



in which R is hydrogen or a methyl group, R<sup>1</sup> and R<sup>2</sup> in each case an alkyl group with 1 to 3 carbon atoms and x an integer from 1 to 4,

B) at least one monomer, which is insoluble or difficultly soluble in water and

C) at least one water-soluble monomer.

It is stated that the polymers described are insoluble at a pH-value of 9.5 or higher and are soluble at a pH-value of 8.5 or lower. A description is given of different ingredients of cleaning agent compositions, which can be successfully and usefully coated with the polymers described. The aim of the invention described therein is that the substances only evolve their function during the rinsing cycle, protect the same up to the start thereof and then immediately release it. The use for dishwashing machines is not described.

A disadvantage of the solution described in these Japanese patent applications is that the enveloped particles are in direct contact with non-alkaline washing water at the start of the washing cycle which can lead to a partial dissolving of the protective envelope.

Japanese patent KOKAI 50-77406 discloses a washing aid surrounded by a water-soluble envelope obtained by mixing polyvinyl acetal dialkyl aminoacetate and at least one organic acid, which is solid at ambient temperature. This protective envelope serves to protect the washing aid during the main washing cycle and release it during rinsing cycles. The described compound reacts to a change of the pH-value between the main washing cycle and the rinsing cycle. The correspondingly enveloped particles are mixed with conventional pulverulent detergent. Here again the disadvantage of a possible partial dissolving of the protective envelope at the start of the washing cycle occurs.

European patent applications EP 284 191 A2 and 284 334 A2 disclose a water-soluble polymer film for the release of washing additives in the rinsing cycle of washing machines which, during the normal washing cycle, remains intact over a typical temperature range and rapidly dissolves in the rinsing cycle. It is pointed out that although the use of pH-sensitive coatings is known, said films are normally temperature-sensitive, so that they are not reliably stable during the different temperatures occurring in the washing cycle. The solution proposed is a pH-dependent material (which undesirably also has a positive temperature-dependent dissolving behaviour), which is combined with a material having a negative temperature-dependent dissolving behaviour. This combination is intended to guarantee that the coatings do not dissolve at the high temperatures at the start of the washing cycle (particularly the very high temperatures occurring in American machines). No reference is made to a use for machine dishwashing agents.

European patent application EP 481 547 A1 discloses multilayer machine dishwashing agent tablets with a core, a separating layer surrounding the core and an outer layer for the sequential release of the ingredients of the different layers. The aim of this tablet is to solve two different problems, namely 1) incompatible materials can be formulated together in a single tablet and released at different times in order to prevent mutual influencing

and 2) compositions intended to evolve their functions at different times can be formulated in a single tablet.

An important disadvantage of this prior art is that for initiating the dissolving of the enveloping layer the temperature and/or in particular the contact time with the washing solution is used as the initiating factor, i.e. temperature-sensitive materials are used for the envelope material. As the temperature/time gradient in dishwashing machines can vary very widely as a function of the selected program, it is difficult, if not impossible, to select a material for the envelope which is usable for all possible programs of modern dishwashing machines. EP 481 547 A1 (p 7, lines 37 to 43) admits that the choice of the material of the enveloping layer must take account of equipment and program-specific details. Thus, the practical usability of the described products is significantly limited.

PCT application WO 95/29982 discloses a machine dishwashing agent with a delayed release of a clear rinsing agent in the form of a nonionic surfactant, which forms together with an inorganic builder salt a core particle, which is provided with a wax-like envelope in order to ensure the delayed release. This envelope is a substance which does not melt at the operating temperatures encountered in the cleaning cycle, but which so gradually chemically disintegrates under alkaline pH-values that there is still left at the end of the main cleaning cycle an active clear rinsing agent quantity which is transferred into the clear rinsing cycle.

It is disadvantageous that the envelope is rendered soluble by chemical saponification under alkaline pH-values, so that the time at which the clear rinsing substance is released from the core is a function both of the temperature and the length of the main cleaning cycle. The patent application provides no teaching for the formulation of a product with which it is possible to release the clear rinsing agent only when the clear rinsing cycle arrives in all washing programs of any machine type. In addition, the core ingredient active as the clear rinsing agent is a nonionic surfactant, which is absorbed on an inorganic builder salt. This leads to inferior clear rinsing results, particularly with respect to marks on glass. The product is finally a mixture of granular detergent and granular clear rinsing agent particles.

In view of the prior art, the problem of the present invention is to provide a composition usable for most rinsing/washing programs of different dishwashing machine types and in each of these cases the substance or substances having only to evolve their action in the clear rinsing cycle are only released at the earliest at the start of the clear rinsing cycle. The aim is to achieve this without restricting the choice of the cleaning agents used, the substance or substances used for the clear rinsing cycle and other



ingredients of the composition.

According to the invention this problem is solved with a solution characterized by a basic composition evolving its function essentially in the main cleaning cycle of the dishwashing machine, as well as at least one particle, with at least one core incorporating at least one substance, which evolves its function essentially in the clear rinsing cycle of the dishwashing machine and an envelope substantially completely surrounding the core or cores incorporating at least one compound, whose solubility increases with decreasing concentration of a specific compound in the surrounding medium. Agents are provided so that at the start of the clear rinsing cycle a significant dissolving of the envelope or a significant detachment of the envelope from the core or cores is prevented.

In an advantageous embodiment the concentration of the specific compound in the local environment of the particle or particles is sufficiently high up to the start of the clear rinsing cycle so that up to this time there is no significant dissolving of the envelope or significant detachment of the envelope from the core or cores.

Preferably the particle or particles are coated with a substance which, substantially independently of the concentration of the specific compound in the surrounding medium, dissolves or separates during the main rinsing cycle of the dishwashing machine.

The basic composition is preferably in the form of a tablet.

An embodiment of the invention proposes that the at least one particle is so placed in or on the tablet that the concentration of the specific compound in the local environment of the particle or particles is sufficiently high up to the complete dissolving of the tablet to prevent a significant dissolving of the envelope or a significant detachment of the envelope from the core or cores.

Preferably the particle or all the particles are received in at least one tablet cavity completely surrounded by the basic composition.

The at least one cavity can receive one or more particles having alone or together essentially the same volume as the cavity.

Preferably the at least one cavity has a larger volume than the or all the particles received in the particular cavity.

In an alternative of the invention the particle or particles are arranged loosely in the cavity interior.

In another alternative the particle or particles are fixed, preferably by an adhesive, in the cavity interior.

In a further embodiment the cavity is positioned substantially centrally in the tablet interior.

The invention also proposes that the tablet has a single, substantially spherical cavity.

According to the invention the cavity receives a single, substantially spherical particle, whose external diameter is smaller than the internal diameter of the cavity.

According to another embodiment the or all the particles are received in at least one cavity of the tablet, which is only partly surrounded by the basic composition.

Preferably the cavity is a depression in one of the surfaces of the tablet in which the particle or particles are at least partly received.

In a preferred embodiment the particle is so received in the cavity or depression that it does not project over the surface or surfaces of the tablet.

A special embodiment of the invention proposes that the cavity or depression only contains a single particle, whose volume and shape in the vicinity of the cavity or depression substantially coincides with the volume and shape of the cavity or depression and substantially completely fills the same.

Preferably the cavity or depression is parallel to one of the surfaces to which it opens or in which it is located and has a substantially circular cross-sectional surface.

The invention also proposes that the cavity or depression opens to the surface or surfaces only to the extent that the particle or particles received therein cannot pass through the opening or openings of the cavity or depression.

It is inventively preferred for the particle or particles to be loosely arranged in the cavity or depression.

In a further alternative the particle or particles are fixed in the cavity or depression, preferably by an adhesive.

According to an embodiment of the invention the basic composition incorporates at least one composition chosen from the group comprising machine dishwashing agent composition, water softener composition and washing intensifier composition.

In a preferred embodiment of the invention the envelope incorporates at least one compound which for the concentration of the specific compound at the end of the main cleaning cycle of the dishwashing machine is not or is only slightly soluble and at the concentration of the specific compound in the clear rinsing cycle has such an adequate solubility that in the clear rinsing cycle it is so substantially dissolved or detached from the core or cores that an at least partial escape of the core material into the clear rinsing cycle medium is possible.

Preferably the solubility of the compound increases with decreasing OH<sup>-</sup> ionic concentration and therefore decreasing pH-value in the surrounding medium.

In particularly preferred manner the compound at a pH-value above 10 has little or no solubility and at a pH-value below 9 has an adequate solubility to ensure a substantially complete dissolving or detachment from the core or cores in the clear rinsing cycle, so that an at least partial escape of the core material into the clear rinsing cycle medium is possible.


Preferably the compound incorporates a polymer, preferably a pH-sensitive polymer, which comprises at least one repeat unit, which has at least one basic function, which is not part of the polymer backbone chain.

In a preferred embodiment the polymer comprises at least one repeat unit, which is based on a compound selected from the group comprising vinyl alcohol derivatives, acrylates or alkyl acrylates, which have said basic function.

According to the invention the polymer is a carbohydrate functionalized with said basic function.


The aforementioned basic function is preferably an amine and in particularly preferred form a secondary or tertiary amine.

In a preferred alternative the repeat unit is based on a compound with the following formula III:

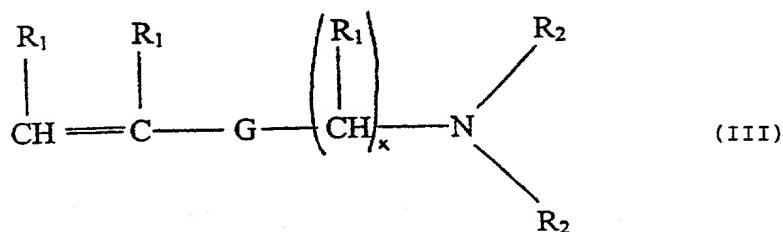

in which G is a linking group selected from -COO-, -OCO-, -CONH-, NHCO-, -NHCONH-, -NHCOO-, -OCONH- or -OCOO-, R<sub>1</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 3 carbon atoms, R<sub>2</sub> independently of one another, hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.

Preferably the repeat unit is based on a compound with the following formula IV:

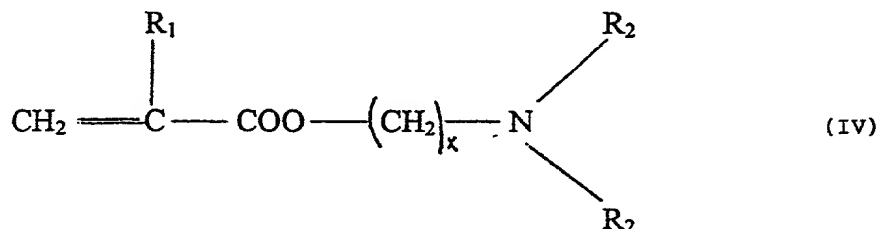

in which R<sub>1</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 3 carbon atoms, R<sub>2</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.

In a further embodiment the basic function is an imine or a basic, aromatic N-containing group, preferably a pyridine group or an imidazole group.

In a further embodiment the pH-sensitive polymer is derived from chitosan.

The invention finally proposes that the compound incorporates K-carrageenan.

In a special embodiment of the invention the core or cores comprise at least one material selected from the group constituted by surfactants, antibacterial compositions, silver protection agents, fragrances, bleaches, disinfectants, odour masking agents, anti-coating agents and enzymes.

The core or at least part of the cores can be in the form of an encapsulated liquid, preferably in the form of a liquid contained in a gelatin capsule.

According to a further embodiment the core or at least part of the cores is in solid form.

Preferably the core or at least part of the cores has a melting point of more than 35°C, preferably between 55 and 70°C.

The invention also relates to a process for performing a dishwashing cycle in a dishwashing machine, where the composition according to the invention is added at an appropriate time during the prerinsing cycle or main cleaning cycle to the medium in the dishwashing machine.

In a special embodiment of the invention for the case that the basic composition in the form of a tablet is not able, following its dissolving in the medium up to the end of the main cleaning cycle to make available a concentration of the specific compound in the medium which is sufficiently high in order to prevent a significant dissolving of the envelope and a significant detachment of the envelope from the core or cores, said adequate concentration of the specific compound is made available by adding a further composition such as e.g. a machine dishwashing agent composition, to the medium of the main cleaning cycle at an appropriate time.

The composition according to the invention is characterized in that it gives excellent results both in the main cleaning cycle and in the clear rinsing cycle of a dishwashing machine. The basic composition, e.g. in the form of a tablet, is dissolved during the main cleaning cycle and can evolve its corresponding action (cleaning, water softening, washing intensification, etc.). The particle according to the invention contains as the core material the substance or substances evolving their main function in the clear rinsing cycle of the dishwashing machine, e.g. clear rinsing agents.

Said substance or substances are protected by an envelope which, at the concentration of a specific compound, e.g. a specific ion such as OH<sup>-</sup> ion (and therefore at a specific pH-value) and the temperature of the main cleaning cycle are stable and do not or only insignificantly dissolve or separate. Only when said concentration drops significantly by dilution, i.e. at the start of the clear rinsing cycle, is the solubility of the enveloping material reduced so significantly that it rapidly dissolves or separates and that the active core material is released in the surrounding medium. It is important that the protection of the core material acts from the addition of the inventive composition to the water up to the start of the clear rinsing cycle, i.e. before the cleaning liquor reaches a sufficiently high concentration of the specific compound, as will be explained hereinafter.

As an alternative to the tablet form of the basic composition used in preferred manner, other administration forms are possible and are covered by the protective scope of the invention. Thus, the particles with the envelope changing in the case of a modification of the concentration of the specific compound with respect to its solubility can be connected, e.g. enveloped with the basic composition by a granulation or similar process. In order to ensure for this embodiment an optionally desired, reduced contact between the envelope and the basic composition, the particles can be surrounded by a further protective jacket, which e.g. comprises a water-soluble compound independent of the concentration of the specific compound. With this embodiment during the main cleaning cycle initially the basic composition and protective jacket of the particles are dissolved and once again the particles

protected by the inventive envelope are left behind.

Unless special charging or dosing aids are used for charging or dosing, which can retain the particles according to the invention, said particles must be chosen sufficiently large that they do not get discharged to a significant extent during the pumping out following the main cleaning cycle and intermediate rinsing cycle or cycles from the dishwashing machine.

The invention is now described in greater detail by means of the following examples and drawings, wherein show:

- Fig. 1                    A typical pH-profile of a dishwashing machine.
- Fig. 2                    A first embodiment of the inventive composition in cross-section.
- Fig. 3                    A second embodiment of the inventive composition in cross-section.
- Fig. 4                    A third embodiment of the inventive composition in cross-section.
- Figs. 5a and b           A fourth embodiment of the inventive composition in cross-section and in plan view.
- Fig. 6                    A fifth embodiment of the inventive composition in cross-section.

The ionic concentration or pH-profiles of the cleaning or rinsing medium in a dishwashing machine are dependent on the ingredients of the cleaning or rinsing agent used. A typical pH-profile when using a conventional, basic machine dishwashing agent, e.g. CALGONIT® can be gathered from fig. 1 (dishwashing machine used, BOSCH model SMS 3047).

The vertical, broken line subdivision indicates the duration of the following stages: prerinsing, main cleaning, intermediate rinsing, clear rinsing. It is clear that the pH-value during most of the main cleaning cycle is between 10 and 10.5. The pH-value drops following the pumping out of the washing liquor at the end of the main cleaning cycle and the inflow of fresh water to a value of 9 during intermediate rinsing and to between 8.5 and 9 during clear rinsing.

Figs. 2 to 6 reveal possible embodiments of the composition according to the invention. In all cases the preferred tablet form is chosen for illustration.

Fig. 2 shows a tablet 1 comprising two half-tablets 2 and 3, which can have the same or a different composition. For example it is possible to use a conventional, commercially marketed two-layer tablet, in which the two layers normally have a different composition and have different colours.

Roughly centrally in both half-tablets is provided a roughly hemispherical recess 4 or 5 which, when the tablet 1 is joined together, form a roughly spherical cavity.

In the represented embodiment in said cavity is placed a single particle 6 comprising a core 8 and the envelope 9 and its external diameter is slightly smaller than the internal diameter of the tablet cavity. In another embodiment of the invention particles 6 can also completely fill the complete tablet cavity and engage against the walls thereof. If the internal diameter of the cavity is slightly larger than the external diameter of the particles 6, the particle can either be loosely received in the cavity or fixed therein by an adhesive applied.

In the embodiment where contact between the particle and the surrounding basic composition is to be reduced or completely prevented, the additional advantage arises that during the production process, e.g. the moulding of the individual components in successive stages, a deformation and possibly resulting damage to the core or cores and/or envelope of the core is reliably avoided and which could lead to a reduction in the protective action of the core envelope. By preventing any pressure on the particle during any production process phase, it can reliably also be prevented that for a specific core composition there is no "bleeding" thereof into the material of the envelope and the basic composition. Finally, for specific compositions of the envelope 9 and basic composition 2, 3, it can be advantageous to avoid an intimate, full-surface contact, because otherwise undesired reactions could arise in the boundary layers.

According to a preferred embodiment of the invention, the surface of the particle is at the most only in partial direct contact with the surface of the basic tablet composition surrounding it. This can take place in the manner described in the application, but also in other ways achieving the sought objective. Examples are the loose arrangement of a smaller particle in a larger cavity, the fixing of a smaller particle in the larger cavity in such a way that no or only a partial contact occurs between the particle and the basic composition, the application of a protective coating to the core envelope according to the invention, etc.

The term "local environment", as used in conjunction with a special embodiment of the particle according to the invention, designates the

immediate environment around said particle. The concentration of the specific compound in this local environment of the particle is the determining factor for its stability. For the preferred embodiments in tablet form this concentration in the local environment of the particle at least up to a substantially complete dissolving of the tablet is determined by the molecule passing into solution. Preferably the origin of the "specific compound", at least in the initial phase of the main cleaning process, is a compound from the basic composition forming the tablet or is produced by it in the surrounding medium. In the most typical case with conventional, basic dishwashing agents, it is represented by  $\text{OH}^-$  ions, whose concentration can be expressed as a pH-value.

If e.g. a basic machine dishwashing agent composition is not used as the basic composition and instead e.g. a water softener composition or a washing intensifier composition, the protection of the particle envelope is possibly only ensured by an adequately high concentration of the specific compound in the local environment of the particle until the basic composition, e.g. the tablet has completely dissolved, namely in the cases where the basic composition is not able to provide a sufficiently high, corresponding concentration in the washing liquor. In these cases the sufficiently high concentration in the washing liquor (and therefore also in the local environment of the particle or particles) is brought about by dissolving the machine dishwashing agent (or a further specific additive).

Obviously not only a conventional adhesive can be used for fixing the particle in the cavity and instead other compositions and agents can be employed which fulfil the same purpose, e.g. a mechanical fixing, such as e.g. adequate frictional engagement between tablet and particle at at least certain points or a plug connection between tablet and particle. It is also possible to use further compounds which melt or dissolve during the main cleaning cycle as fixing agents between the tablet and particle.

Obviously for the design of the cavity in the tablet or the particle received therein the most varied further geometrical shapes are possible, such as e.g. an ellipsoid, cylinder, etc. The design and size of the cavity in the tablet and the particle received therein need not correspond to one another. Thus, a cylindrical particle can e.g. be received in a spherical cavity. All possible further combinations can take place within the scope of the present invention. It is also possible to fill the cavity with several smaller particles instead of a single particle.

Fig. 3 shows a second embodiment of the inventive composition based on a conventional two-layer tablet 1. Here the upper half-tablet 3 is in two parts, which make available both an adequate cavity 5 for receiving the particle 6 and also an opening to the tablet side 11. Thus, in this case the



particle 6 is not completely surrounded by the basic composition of the tablet 1, so that it is visible from the outside in the interior of the tablet 1. Here again the particle can either be loosely received in the cavity 5 (provided that by a corresponding choice of the size of the particle 6 on the one hand and the size of the opening of the cavity 5 to the tablet side 11 on the other it is ensured that the particle or particles cannot pass through the opening in the cavity) or fixed in the interior of the cavity by corresponding agents, such as e.g. adhesives.

Fig. 4 shows a third possible embodiment. It is based on a unitary tablet 1', i.e. a single layer 2' with a unitary composition and colour. Using a suitable device a depression 4' is formed in said layer 2'. Into the depression 4' is placed the particle 6', which in this case, because the depression to the side 11' of the tablet 1 is only open to the extent that without fixing the particle could drop out of the depression, it is fixed in the depression with an adhesive 10' or a fixing intermediate layer or mechanically (e.g. by frictional engagement). This principle can obviously be transferred to multilayer tablets.

Here again the most varied geometrical configurations are possible. Thus, the depression e.g. parallel to the side 11' can have a substantially circular cross-section. However a random number of other cross-sections is possible, e.g. any random polygon. The particle 6' received in the depression 4', as in the embodiment of fig. 3, can assume any random shape (independent of the shape of the depression 4'), such as e.g. an ellipsoid, cylinder, parallelepiped, etc.

It is also possible to fix the particle 6' in a cavity in the tablet open on both sides, such as e.g. in a cylindrical hole 4' passing through the tablet body 1' and in which is fixed a corresponding, cylindrical particle 6' (figs. 5a and b).

A further possible embodiment can be gathered from fig. 6. This is essentially constructed like the embodiment of fig. 4, i.e. a tablet 1' having a unitary structure, i.e. formed from a single layer 2" with a unitary composition and colour. However, in the present case the particle 6" not only contains a single core (as in fig. 4), but a plurality of cores 8" all embedded in an envelope 9". In this embodiment it is e.g. also possible to incorporate into a particle 6" cores having different composition and different shape (encapsulated material or solid cores).

Both in the represented embodiments and further conceivable alternatives it is essential that for the particle containing the substance or substances to be released in the clear rinsing cycle, at least in the first phase of the main cleaning cycle, a local environment exists with an adequate

concentration of the specific compound serving as a "trigger" for dissolving the envelope, i.e. in a phase where the concentration is still relatively low, i.e. briefly in a range in which increased solubility of the envelope would exist. This ensures that the envelope has an adequate stability up to the clear rinsing cycle.

#### Example 1

##### Production of the core

##### a. Core for a particle for the controlled release of a clear rinsing agent in the clear rinsing cycle

The core of the particle or particles, which is only to evolve its activity in the clear rinsing cycle, must incorporate at least one substance acting as a clear rinsing agent. Advantageously, in the present invention, use is made of a slightly foaming, nonionic surfactant. Such surfactants are e.g. fatty alcohol ethoxylates, fatty alcohol ethoxylate/propoxylates, ethoxylate/propoxylate polymers, such as e.g. the products of Synperonic® and Brij® range of ICI, the products from the Plurafac®, Pluronic® and Lutensol® range of BASF, the products from the Genapol® range of Clariant and the products from the Poly-tergent® range of Olin.

Other possible examples for such surfactants are alkyl polyglycosides, glucamides and alkyl pyrrolidones. It is obviously possible to use all other surfactants able to evolve the desired action as clear rinsing agents.

Most substances known for use as clear rinsing agents are liquids or wax-like solids. However, in the present invention, a decisive part is not played by the aggregate state of the substance acting as the clear rinsing agent. If liquids are used they can be made available prior to the application of the envelope as surfactant-containing capsules, such as e.g. gelatin capsules or can be brought into an envelopable state by other appropriate measures. Solids can conventionally be directly provided with the envelope and the coating process may have to be matched to the corresponding substance.

For the purposes of the present invention melt mixtures have proved particularly advantageous and supply solid surfactant particles with a melting point above 35°C, preferably between approximately 55 and 70°C.

The combinations given in table 1 of different polyethylene glycols with the surfactants Synperonic® RA 30, a block ethylene oxide/propylene oxide, bound to a C<sub>13</sub>-C<sub>15</sub> alcohol (C<sub>13</sub>/C<sub>15</sub>O(EO)<sub>6</sub>(PO)<sub>3</sub>) were produced in the form of melt mixtures as cylinders weighing approximately 0.25 g. Melting point determinations gave the values of table 1.

Table 1

Code	RA 30 [%]	PEG 8000 [%]	PEG 10000 [%]	PEG 20000 [%]	PEG 350000 [%]	melting point [°C]
C1	30		70			58-63
C2	40		60			57-60
A30	50		50			57-60
A31	60		40			54-58
A30	50	50				57-60
C3	60	40				57-60
C4	65	35				55-59
A33	50			50		59-65
C17	60			40		58-63
C18	70			30		57-64
A34	50				50	59-65
C15	60				40	58-66
C16	70				30	57-64

Although all combinations are fundamentally suitable, in particular the 50:50 mixture A33 revealed an excellent stability and was easy to handle, particularly with a view to the subsequent coating process. All samples dissolved rapidly in water, so that in each case an optimum activity as a clear rinsing agent is ensured.

The invention is obviously in no way restricted to the combinations given in exemplified form. As stated, it is possible to use in the present invention any type of surfactant usable as a clear rinsing agent.

b. Core for a particle for the controlled release of a fragrance in the clear rinsing cycle

Bleach-containing, i.e. oxidizing dishwashing agent compositions significantly limit the use possibilities of fragrances usable in such compositions. The controlled release of a fragrance in the clear rinsing cycle would allow a much greater flexibility when using fragrances.

For the controlled release of a fragrance or fragrance composition in the clear rinsing cycle, it is possible to produce a core for a corresponding inventive particle, in that a mixture of 50 wt.% melted polyethylene glycol, e.g. PET 8000, 25 wt.% fragrance or fragrance composition and 25 wt.% diethyl phthalate are cooled in a mould in order to form an e.g. spherical particle weighing e.g. 0.75 g.

c. Core for a particle for the controlled release of an antibacterial composition in the clear rinsing cycle

The use of an inventive particle with a core or several cores incorporating an antibacterial composition in a tablet for use in a dishwasher would make available the possibility of simultaneously releasing two different compositions in the clear rinsing cycle, namely the antibacterial composition from the core or cores of the particle according to the invention and the clear rinsing agent from the conventional charging device of the dishwasher.

For such a particle a corresponding core is produced in that a mixture of 100% melted benzalkonium chloride (Barquat® MS-100) is cooled in a mould in order to produce an e.g. spherical particle weighing e.g. 0.64 g.

d. Core for a particle for controlled release of enzymes in the clear rinsing cycle

As proteases, which are conventionally used in dishwashing agent compositions, are proved to degrade lipases and therefore can reduce their activity, it would be desirable to incorporate such lipases into the core or cores of a particle according to the invention, so that the lipases would only be released in controlled form in the clear rinsing cycle, which could permit an optimum efficiency of these enzymes.

For this purpose 0.4 g of a granular, lipolytic enzyme (e.g. Lipolase® 100T (Novo)) can be added to a hard gelatin capsule with an e.g. rounded, cylindrical shape, e.g. of the type used for medicaments.

Example 2

Screening process for enveloping materials

As stated hereinbefore it is vital for the present invention that the material for enveloping the particle core or cores incorporates the substances evolving their function essentially in the clear rinsing cycle of the dishwasher has a solubility dependent on the concentration of a specific, selected ion. In this way the envelope is substantially insoluble in the main cleaning cycle and is made soluble and is detached from the particle if the concentration decreases during the intermediate rinsing cycle or cycles or the clear rinsing cycle.

It has been observed that the dilution resulting from the pumping out of the

washing liquor and the inflow of fresh water during the different rinsing cycles leads to the concentration decreasing 20 to 200 times between the end of the main cleaning cycle and the last rinsing cycle.

On the basis of this observation processes for screening the suitability of different polymers for their use as enveloping materials have been developed consisting of determining the solubility of such polymers at two different concentrations, which differ by at least 20 times and preferably by 200 times.

The values for the concentration, to be used during the screening of the polymers, are dependent on the formulation of the basic composition of the tablet into which the enveloped particle is to be incorporated.

In fact, the value for the highest concentration to be used for the screening process corresponds to the concentration of the selected ion encountered in the washing liquor, after the machine dishwashing agent has completely dissolved. Once this concentration has been determined, the lower value for the concentration should be fixed at 20 to 200 times below said higher value.

With these details it falls within the routine capacity of an expert in this field to determine the values for the concentration of the test solutions to be used in the different test methods described hereinafter.

#### Process for the preparation of the test solution and performing and evaluating the test

The materials to be investigated are dissolved in solvents in which they are readily soluble. The solutions are spread over glass plates, then dried at ambient temperature until a constant weight occurs.

The glass plates are added at a controlled temperature to a beaker with test solution. The solution is then stirred with a magnetic stirrer at a controlled stirring speed. After about 10 minutes the glass plates are removed from the beaker and dried at ambient temperature to constant weight. The results are expressed as weight loss (%).

Obviously the screening processes must be adapted to the composition of the machine dishwashing agent, because they exert a significant influence on the concentration or pH-profile in the dishwashing cycle. The aim is in each case to check the degree of solubility of the corresponding materials under different states, namely high or low concentration or pH-value.

With this information an average capacity only is required on the part of the expert to draw up specific test parameters for screening. For example, hereinafter two screening processes are described enabling the testing of some of the possible materials for the envelope of the particle according to the invention.

#### Screening process 1

Screening process 1 was performed with buffer solutions as the medium for simulating the washing liquor. To this end two buffer solutions were prepared in the following way:

Stock solution:     7.507 g glycine buffer (Merck 104169)  
                      5.850 g NaCl  
                      topped up with water to 1000 ml

pH 8 buffer           500 ml stock solution  
solution:             500 ml distilled H<sub>2</sub>O  
                      1.23 g of 1 N NaOH

pH 10 buffer          500 ml stock solution  
solution:             500 ml distilled H<sub>2</sub>O  
                      32.6 g of 1 N NaOH.

#### Screening process 2

Screening process 2 was performed with the following cleaning agent formulation in order to simulate the conditions in different stages of a dishwasher cycle. Concentrations of 4 to 5 g/l are of a conventional nature for the cleaning agent load in the washing cycle. Concentrations of approximately 20 to 40 mg/l are of a conventional nature for the clear rinsing cycle.

Cleaning agent formulation

Ingredient	wt. %
Sodium perborate monohydrate	9.00
Sodium tripolyphosphate	48.00
Sodium carbonate	28.00
Polyethylene glycol	4.00
Polymer	1.50
TAED	3.00
Enzyme	1.50
Surfactant	3.50
Additive	1.50
Total	100.00

Screening process 3

Screening process 3 is used for screening compounds, whose solubility changes as a function of the concentration of potassium ions. The compounds discovered with such a screening process can be used if in the main cleaning cycle, as stated hereinbefore, there is a correspondingly high potassium ion concentration, which must be correspondingly reduced by dilution in the clear rinsing cycle.


Screening process 3 was performed with the following formulation to simulate corresponding conditions.

Formulation

Ingredient	wt. %
Potassium tripolyphosphate	13.6
Potassium bicarbonate	34.0
Potassium sulphate	23.1
Potassium chloride	12.4
Potassium carbonate	9.7
Boric acid	2.0
Sodium perborate monohydrate	2.0
TAED	1.0
Paraffin	1.0
Protease	0.2

Example 3Selection of materials for the particle envelope

Using the screening processes described in example 2 different materials were tested for their suitability as an envelope for the particle according to the present invention. One of these materials, hereinafter called "polymer 1" is a polymer such as is described in Japanese patent application KOKAI 61-28440, i.e. having the general formula II with  $1/(1+m+n) = 0.35$ ;  $m/(1+m+n) = 1500-1800$ .

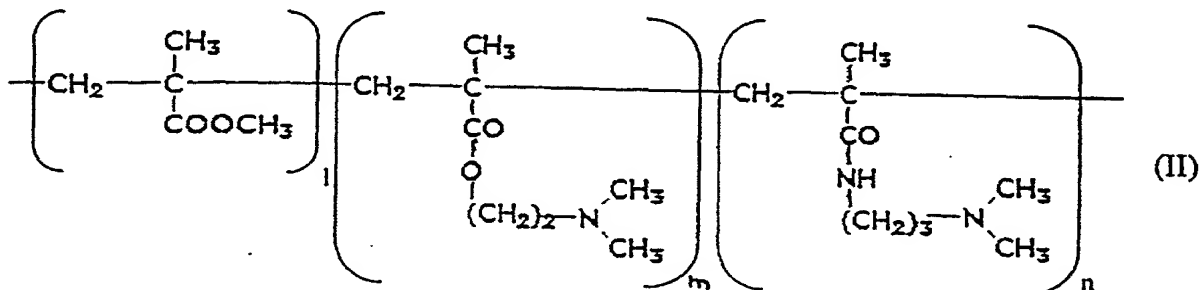

The polymer was produced in the conventional manner by bulk polymerization. The screening test results were as follows:

#### Screening process 1:

Films of polymer 1 were produced from a 10% solution in isopropanol.

pH-value of buffer solution	weight loss at 30°C [%]	weight loss at 60°C [%]
10	7-8	5-8
8	81-88	91-95


#### Screening process 2:

Films of polymer 1 were produced from a 10% solution in a mixture of water and 1 N HCl (17:1).

Detergent conc. pH-value	Weight loss at 30°C [%]	Weight loss at 60°C [%]
4 g/l 10.6	8-15	6-15
0,02 g/l 8.5	90-95	89-95




The invention is obviously not restricted to this exemplified polymer and naturally a wide variation possibility exists with respect to the polymers referred to in Japanese patent applications KOKAI 60-141705, 61-28440, 61-28441, 61-28596, 61-28597 and 61-28598 and can be extended to compounds of formula IV:

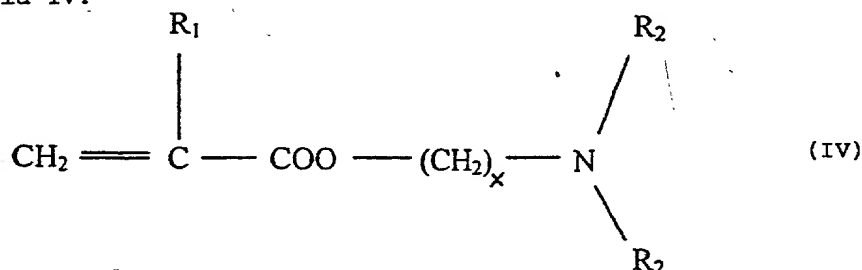


in which R<sub>1</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 3 carbon atoms, R<sub>2</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.


In addition, within the larger class of compounds according to formula III:

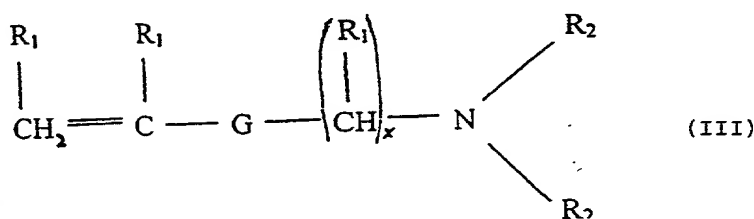

in which G is a linking group selected from -COO-, -OCO-, -CONH-, NHCO-, -NHCONH-, -NHCOO-, -OCONH- or -OCOO-, R<sub>1</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6, in exemplified manner polymers can be used having a repeat unit based on a compound of formula V:

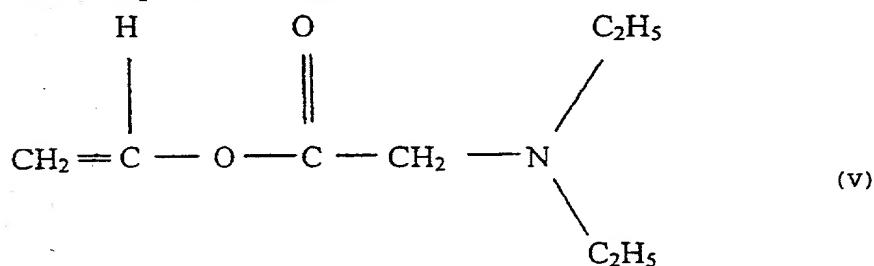


e.g. a pH-sensitive polymer ("polymer 2") with the repeat unit VI, which is commercially obtainable from SANKYO under the trade name AEA®,

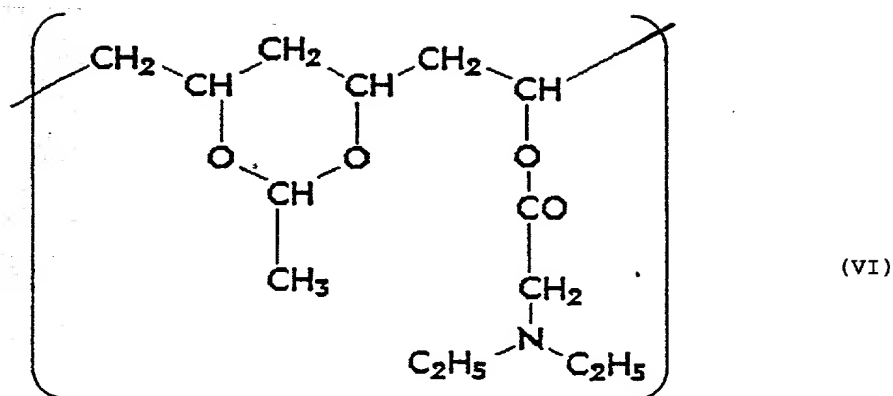

The above-described screening process 2 was also carried out with polymer 2. 15 g of polymer 2 and 5 g of Mowiol® 3-98 (Clariant) were dissolved in 200 ml of a water/ethanol/1 N HCl 12:8:1 mixture. Films were formed and tested in the manner described hereinbefore and the following results were obtained.

Detergent conc.	Weight loss at 30°C	Weight loss at 60°C
pH-value	[%]	[%]
4 g/l	2-8	5-7
10.6		
0.02 g/l	32-40	45-47
8.5		

Further polymers having the desired characteristics or which can be easily modified in such a way that they are suitable for the purposes of the present invention are polymers of isomers or derivatives of pyridine, preferably copolymers with styrene or acrylonitrile of formulas VII and VIII, in which G is a substituent at a random point of the pyridine ring.


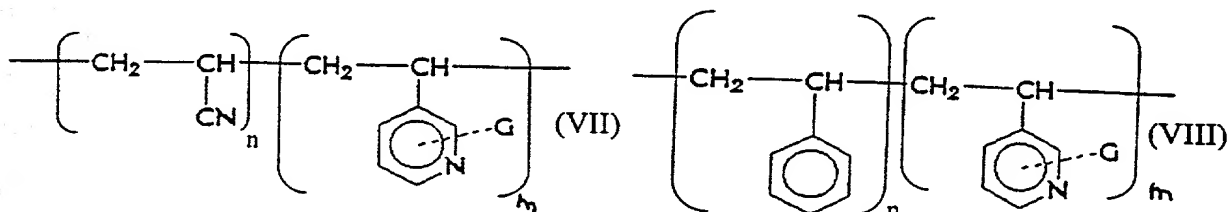


A polymer according to formula VIII, namely poly(4-vinylpyridine styrene) copolymer (Scientific Polymer Products, Inc.) "polymer 3" was tested according to screening process 2. 10 g of polymer 3 were dissolved in 230

ml of water/1 N HCl 6.25:1. The formation of the films and the performance of the tests were in the manner described hereinbefore and the following results were obtained:


Detergent conc. pH-value	Weight loss at 30°C [%]	Weight loss at 60°C [%]
4 g/l 10.6	0-6	5-12
0.02 g/l 8.5	68-85	92-94

Further polymers are (e.g. random) polymers derived from chitosan, based on the following monomer units IX and X

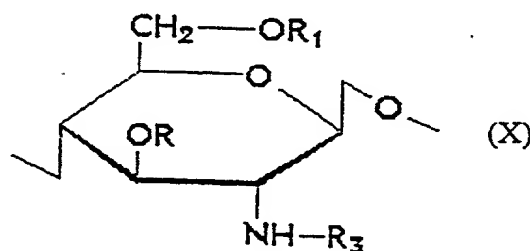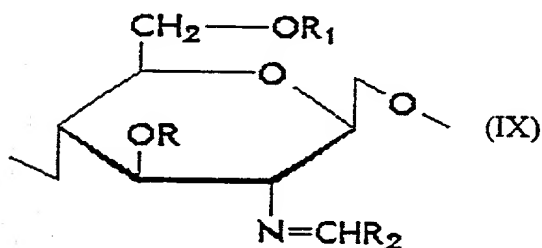

It is also possible to use in the core material envelope substances or substance mixtures which, with regards to their solubility behaviour, react to a change in the ionic concentration, i.e. ionic concentration-sensitive polymers. For this purpose it is e.g. possible to use the partly hydrolyzed polyvinyl acetates (commercially available under the trade names Mowiol® - Clariant) described in EP 284 191 A2 and EP 284 334 A2, which reveal a corresponding ionic concentration dependence in the presence of borates due to the complexing of the borates with polyols. Initial successful tests have been carried out with Mowiol® 56-88.

Another ionic concentration-sensitive polymer is the polysaccharide K-carrageenan, which proved to be in screening process 3 (cf. example 2) a polymer whose solubility is dependent on the potassium ion concentration in the surrounding medium. K-carrageenan is represented by the following formula XI:

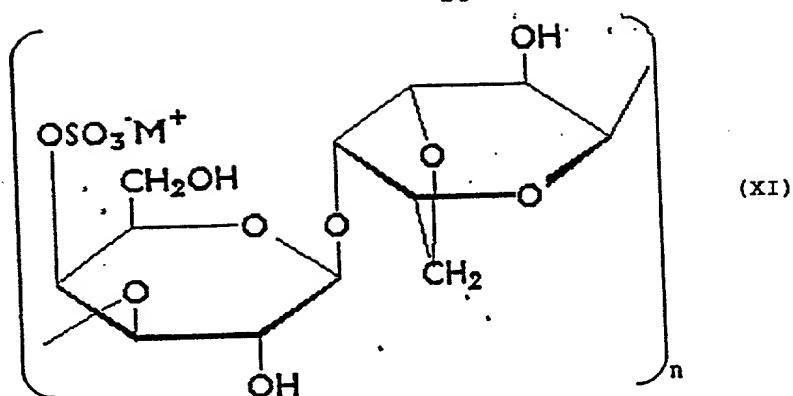

This polymer, called "polymer 4" was tested according to screening process 3.

4 g of K-carrageenan were dissolved in 96 g of water. 10 g of Mowiol® 18-88 were dissolved in 90 g of water and both solutions were mixed. The resulting solution was used for forming films and performing tests in the manner described hereinbefore and the following results were obtained:

Detergent conc.	Weight loss at 30°C [%]	Weight loss at 60°C [%]
4 g/l	0.5-3.0	11.0-12.0
0.02 g/l	24.5-25.0	78.0-85.0

The above list of compounds suitable for the envelope according to the invention is obviously not exhaustive. Further polymers, which change their solubility by a modification of the pH-value or concentration in the desired range are conceivable or can be developed and are consequently covered by the protective scope of the present invention. It is inter alia possible to use for the envelope according to the invention compounds which, with respect to their solubility behaviour, react to a change in the concentration of nonionic compounds in the surrounding medium. The substances suitable for the envelope according to the invention are not limited to polymeric compounds, although such compounds are preferred.

With the aid of the aforementioned screening process or processes, which are adapted to the measurement of an concentration sensitivity, further commercially available materials or those obtainable by easy modifications can be tested for their suitability in the present invention. The choice of such polymers is an easily solved problem for the expert in view of the correspondingly clear aims and the indicated screening processes.

Example 4Production of a particle according to the invention

The different cores described in example 1 were used as a basis for the production of particles according to the invention. These cores were individually or in a plurality (fig. 6) provided with an envelope in a device for the application of a film coating of the type known in the pharmaceutical industry (e.g. obtainable from Lödiger, Hüttlin, GS, Manesty and Driam).

In the case where the core or cores have an ingredient revealing a certain incompatibility with the envelope material, prior to the application of said envelope the core or cores can be provided with a protective coating. It is possible to use various prior art materials such as e.g. cellulose, cellulose derivatives, polyvinyl alcohol, polyvinyl alcohol derivatives and mixtures thereof. Although not prescribed, when using the cores of example 1 such a protective coating was used in all cases and use was made in preferred manner of a 10 wt.% aqueous solution of a polyvinyl alcohol, e.g. the polyvinyl alcohol Mowiol® 5-88 (Clariant). The quantity of the protective coating applied can be varied by the expert as a function of the core composition and correspondingly adapted. Initial tests have revealed good results with 3 wt.% in case 1a, 2 wt.% in case 1b, 3 wt.% in case 1c and 4 wt.% in case 1d of the polymer (dry weight), in each case based on the weight of the complete particle.

The concentration-sensitive envelope can be applied to the core or cores or the protective coating in any random quantity and thickness, provided that it is ensured that the envelope is sufficiently rapidly dissolved or detached in the clear rinsing cycle to enable the substance contained therein to evolve its action. In a preferred embodiment to the cores are applied 1 to 10 wt.%, preferably 4 to 8 wt.% of the concentration-sensitive enveloping material (dry weight), based on the total particle weight.

Preferably the size of the inventive particles should be such that they are not or at least not significantly discharged from the dishwasher during the pumping out processes following the main cleaning cycle or intermediate rinsing cycle. Generally a size of max diameter 1 cm is adequate. Larger or smaller dimensions can obviously be chosen, provided that the appropriate operation overall is ensured.

For the further tests "polymer 1" of example 3 was used as the envelope and applied as 10% solution of the polymer in 0.055 N aqueous HCl.

Example 5Production of a two-layer dishwashing agent tablet with clear rinsing agent particles

A typical two-layer dishwashing agent tablet suitable for receiving a clear rinsing agent particle in the cavity formed therein in accordance with the present invention, can be produced by moulding the pulverulent ingredients in prior art machines and using operating parameters known from the prior art. One possible tablet shape is a parallelepipedic tablet formed from two substantially equally thick layers and in the largest surface of each of these layers is formed a hemispherical recess, so that on joining together the two half-tablets a substantially spherical cavity is formed in the interior (cf. fig. 2).

The composition of the dishwashing agent tablet is based on commercially available products. An exemplified composition can be gathered from table 2. It is obviously possible to use other compositions, particularly those optimized for supporting the compound surrounding the core (e.g. in the provision of alkalinity).

Table 2

	White layer	Coloured layer
	50%	50%
Sodium perborate monohydrate	18.00	
Sodium tripolyphosphate	48.00	48.00
Sodium carbonate	24.00	32.00
Polyethylene glycol 6000	3.00	5.00
Polymer		3.00
TAED		6.00
Enzyme		3.00
Dye		0.02
Surfactant	4.50	2.50
Additive	2.50	0.50
	100.00	100.00

For the tests performed in examples 6 and 7 half-tablets weighing approximately 11.5 g were produced. The cavity resulting from the joining of the half-tablets had an internal diameter of approximately 1.2 cm.

The clear rinsing agent particle produced according to examples 1a and 4 is placed in a hemispherical recess of the white or coloured half-tablet. Subsequently a fixing substance, e.g. an adhesive (e.g. polyethylene glycol,

polyvinyl ether, polyvinyl alcohol, silicate, preferably melted PEG 4000) is applied to the corresponding half-tablet surface and optionally the clear rinsing agent particle and the second half-tablet (coloured or white) is pressed onto the first half-tablet with clear rinsing agent particle.

#### Example 6

This example describes a test proving the transfer of the clear rinsing agent surfactant into the clear rinsing cycle using the tablet produced according to example 5.

The clear rinsing agent particles have an average surfactant or polyethylene glycol content of in each case approximately 0.37 g. The average water quantity in the clear rinsing cycle is approximately 5 litres. The expected maximum quantity of surfactant plus PEG in the clear rinsing cycle should therefore be 0.148 g/l when using one tablet per rinsing cycle.

In each case three different tests were performed with three different tablets in a BOSCH SMS 3047 dishwasher. The water hardness was approximately 17° dH.

1. Dishwashing agent tablet without clear rinsing agent particles;  
temperature 65°C.
2. Dishwashing agent tablet with clear rinsing agent particles (example 6);  
temperature 65°C.
3. Dishwashing agent tablet with clear rinsing agent particles (example 6);  
temperature 55°C.

In each test a minimum of 1 litre of washing liquor was removed from the clear rinsing cycle shortly before the water was drained. The samples were designated 1.1 to 3.3. The liquor was then analyzed in order to detect the total quantity of surfactant plus polyethylene glycol in the clear rinsing cycle. The measurements were performed in that the surfactant and PEG were extracted, the solvent evaporated and a gravimetric determination of the nonvolatile residue was performed.

It is pointed out that with this analytical method both the nonionic surfactant and the polyethylene glycol can be established.

Table 3

	Test 1 mg/l	(n=1) %	Test 2 mg/l	(n=2) %	Test 3 mg/l	(n=3) %
n.1	1.0		43.6	29.5	91.9	62.1
n.2	10.4		48.8	33.0	64.2	43.4
n.3	7.0		32.7	22.1	76.5	51.7

Example 7

The test described in this example is used for testing the composition according to the invention for effectiveness in the clear rinsing cycle.

For comparison with the inventively produced dishwashing agent tablet with clear rinsing agent particles, as produced in example 6, the clear rinsing efficiency of separately added dishwashing agent and clear rinsing agent was investigated. The dishwashing agent corresponded to the composition of the tablet according to the invention and a commercial clear rinsing agent was used. A BOSCH SMS 3047 dishwasher was used. The water hardness was approximately 17 to 19° dH. The temperature was 65°C. The dishwasher was loaded with 20 glasses, 20 black porcelain plates and 20 cutlery items.

The dirtying of the dishwasher load was carried out in the following way. 50 g of minced meat (pork:beef 1:1) were roast with 2 g of fat. After reaching a slightly brownish colour, to the meat was added a gravy containing 100 ml of water, 1 g of gravy binder and 2.5 g of instant gravy.

This material was added to the dishwasher, the screen being closed by a plug in order to have the dirtying action in the machine up to the end of the washing program. The dishwashing agent was fed in at the start of the clear rinsing cycle. The dishwasher load was evaluated 10 minutes after the end of the dish rinsing cycle.

Visual evaluation was based on the following:

4 points = no marks

3 points = 1 to 4 marks

2 points = more than 4 marks up to  $\frac{1}{4}$  of the surface covered with marks

1 point =  $\frac{1}{4}$  to  $\frac{1}{2}$  the surface covered with marks

0 point = almost completely covered with marks.



The mark or spot prevention efficiency is expressed as a percentage, 100% efficiency representing the maximum number of 228 points. The results are given in table 4.

Table 4

## Efficiency

	Cleaning agent + 2 ml of clear rinsing agent	Cleaning agent + 3 ml of clear rinsing agent	Tablet with clear rinsing agent particles
Porcelain	66.9	75.6	96.9
Glass	25.6	26.9	49.4
Cutlery	80.6	90.6	78.8
Total	57.7	64.4	75.0

The results reveal an excellent clear rinsing agent of the composition according to the invention. This was particularly marked with porcelain and glass, the efficiency in the case of table cutlery being comparable with that of conventional compositions. Surprisingly there was in part superior clear rinsing efficiency of the inventive composition compared with the conventional procedure of separately adding dishwashing agent and clear rinsing agent.

The features of the invention disclosed in the above description, the claims and the drawings can be essential to the implementation of the invention in its different embodiments, both singly and in random combination.

CLAIMS

1. Composition for use in a dishwashing machine, characterized by

- a basic composition (2, 3; 2') evolving its function essentially in the main cleaning cycle of the dishwashing machine and
- at least one particle (6; 6'; 6'') with
  - at least one core (8; 8'; 8'') incorporating at least one substance evolving its function essentially in the clear rinsing cycle of the dishwashing machine and
  - an envelope (9; 9'; 9'') substantially completely surrounding the core or cores and incorporating at least one compound, whose solubility increases with decreasing concentration of a specific compound in the surrounding medium,

in which agents are provided, so that at the start of the clear rinsing cycle a substantial dissolving of the envelope (9; 9', 9'') or an essential detachment of the envelope (9; 9'; 9'') from the core (8; 8') or the cores (8'') is prevented.

2. Composition according to claim 1, characterized in that the concentration of the specific compound in the local environment of the particle or particles (6; 6'; 6'') is sufficiently high up to the start of the clear rinsing cycle to ensure that up to this time a substantial dissolving of the envelope (9; 9'; 9'') or a substantial detachment of the envelope (9; 9'; 9'') from the core (8; 8') or cores (8'') is prevented.

3. Composition according to claim 2, characterized in that the particle or particles (6; 6'; 6'') are coated with a substance which, substantially independently of the concentration of the specific compound in the surrounding medium, dissolves or separates during the main washing cycle of the dishwashing machine.

4. Composition according to one of the claims 1 to 3, characterized in that the basic composition is in the form of a tablet (1; 1').

5. Composition according to claim 4, characterized in that the at least one particle (6; 6'; 6'') is so placed in or on the tablet (1; 1') that the concentration of the specific compound in the local environment of the particle or particles is sufficiently high up to the substantially complete

dissolving of the tablet (1; 1') in order to prevent a substantial dissolving of the envelope or a substantial detachment of the envelope from the core or cores.

6. Composition according to claim 5, characterized in that the particle or particles (6) are received in at least one cavity (4, 5) of the tablet (1) completely surrounded by the basic composition (2, 3).

7. Composition according to claim 6, characterized in that the at least one cavity (4, 5) contains one or more particles (6), which alone or together substantially has the same volume as the cavity (4, 5).

8. Composition according to claim 6, characterized in that the at least one cavity has a larger volume than the or all the particles (6) received in the particular cavity (4, 5).

9. Composition according to claim 8, characterized in that the particle or particles (6) are loosely arranged in the interior of the cavity (4, 5).

10. Composition according to claim 8, characterized in that the particle or particles (6) are fixed in the interior of the cavity (4, 5).

11. Composition according to claim 10, characterized in that the particle or particles (6) are fixed by an adhesive in the interior of the cavity (4, 5).

12. Composition according to one of the claims 6 to 11, characterized in that the cavity (4, 5) is substantially centrally positioned in the interior of the tablet (1).

13. Composition according to one of the claims 6 to 12, characterized in that the tablet (1) has a single, substantially spherical cavity (4, 5).

14. Composition according to one of the claims 8 to 13, characterized in that a single, substantially spherical particle (6), whose external diameter is smaller than the internal diameter of the cavity (4, 5) is received in the latter.

15. Composition according to claim 5, characterized in that the or all the particles (6'; 6'') are received in at least one cavity (4') of the tablet (1'), which is only partly surrounded by the basic composition.

16. Composition according to claim 15, characterized in that the cavity is a depression (4') in one of the surfaces (11') of the tablet (1') in which the

particle or particles (6'; 6") are at least partly received.

17. Composition according to claim 15 or 16, characterized in that the particle or particles (6'; 6") are received in the cavity or depression (4') in such a way that they do not project over the surface or surfaces (11') of the tablet (1').

18. Composition according to one of the claims 15 to 17, characterized in that the cavity or depression (4') only contains a single particle (6'; 6"), whose volume and shape in the vicinity of the cavity or depression substantially coincides with the volume and shape of the cavity or depression (4') and substantially completely fills the same.

19. Composition according to one of the claims 15 to 18, characterized in that the cavity or depression (4') has a substantially circular cross-sectional surface parallel to one of the surfaces (11') to which it opens or in which it is placed.

20. Composition according to one of the claims 15 to 19, characterized in that the cavity or depression (4') only opens towards the surface or surfaces (11') to such an extent that the particle or particles (6; 6'; 6") received therein cannot pass through the opening or openings of the cavity or depression (4').

21. Composition according to claim 20, characterized in that the particle or particles (6'; 6") are loosely arranged in the cavity or depression (4').

22. Composition according to one of the claims 15 to 20, characterized in that the particle or particles (6'; 6") are fixed in the cavity or depression (4').

23. Composition according to claim 22, characterized in that the particle or particles (6'; 6") are fixed by an adhesive (10') in the cavity or depression (4').

24. Composition according to one of the preceding claims, characterized in that the basic composition (2, 3; 2') comprises at least one composition selected from the group consisting of a machine dishwashing agent composition, a water softener composition and a washing intensifier composition.

25. Composition according to one of the preceding claims, characterized in that the envelope (9; 9'; 9") incorporates at least one compound which, at

the concentration of the specific compound at the end of the main cleaning cycle of the dishwashing machine is not or is only slightly soluble and at the concentration of the specific compound in the clear rinsing cycle has such an adequate solubility that it is so significantly dissolved in the clear rinsing cycle or detached from the core or cores that an at least partial escape of the core material into the medium of the clear rinsing cycle is made possible.

26. Composition according to claim 25, characterized in that the solubility of the compound increases with decreasing OH<sup>-</sup> ionic concentration and therefore decreasing pH-value in the surrounding medium.

27. Composition according to claim 26, characterized in that at a pH-value above 10 the compound has no or only a limited solubility and at a pH-value below 9 a solubility which is adequate to ensure that in the clear rinsing cycle it is so significantly dissolved or detached from the core or cores that an at least partial escape of the core material into the medium of the clear rinsing cycle is made possible.

28. Composition according to one of the claims 25 to 27, characterized in that the compound comprises a polymer.

29. Composition according to claim 28, characterized in that the compound comprises a pH-sensitive polymer, which incorporates at least one repeat unit, which has at least one basic function, which is not part of the polymer backbone chain.


30. Composition according to claim 29, characterized in that the polymer has at least one repeat unit, which is based on a compound selected from the group consisting of vinyl alcohol derivatives, acrylates or alkyl acrylates having said basic function.

31. Composition according to claim 29, characterized in that the polymer is a carbohydrate functionalized with said basic function.

32. Composition according to one of the claims 29 to 31, characterized in that the basic function is an amine.


33. Composition according to claim 32, characterized in that the basic function is a secondary or tertiary amine.

34. Composition according to claim 33, characterized in that the repeat unit is based on a compound with the following formula III:

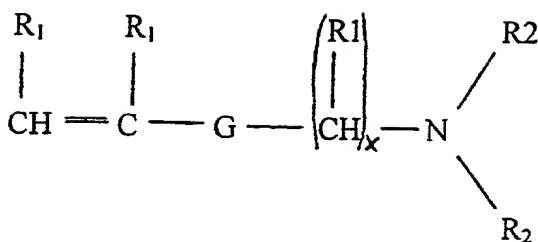

in which G is a linking group selected from -COO-, -OCO-, -CONH-, -NHCO-, -NHCONH-, -NHCOO-, -OCONH- or -OCOO-, R<sub>1</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 3 carbon atoms, R<sub>2</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.

35. Composition according to claim 34, characterized in that the repeat unit is based on a compound with the following formula IV:

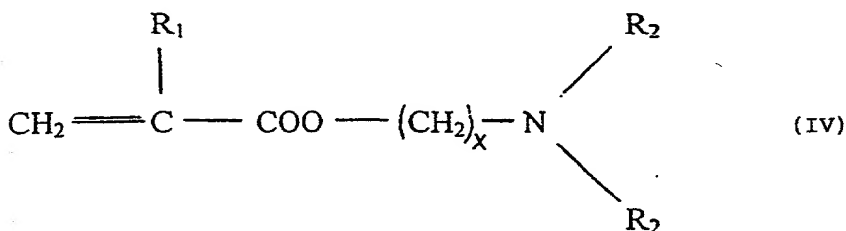

in which R<sub>1</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 3 carbon atoms, R<sub>2</sub>, independently of one another, hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.

36. Composition according to one of the claims 29 to 31, characterized in that the basic function is an imine.

37. Composition according to one of the claims 29 to 31, characterized in that the basic function is a basic, aromatic N-containing group.

38. Composition according to claim 37, characterized in that the basic function is a pyridine group.

39. Composition according to claim 37, characterized in that the basic function is an imidazole group.

40. Composition according to claim 31, characterized in that the pH-sensitive polymer is a polymer derived from chitosan.

41. Composition according to claim 25, characterized in that the compound incorporates K-carrageenan.

42. Composition according to one of the preceding claims, characterized in that the core or cores incorporate at least one material selected from the group consisting of surfactants, antibacterial compositions, silver protection agents, fragrances, bleaches, disinfectants, odour masking agents, anti-coating agents and enzymes.

43. Composition according to claim 42, characterized in that the core (8; 8') or at least part of the cores (8'') is in the form of an encapsulated liquid.

44. Composition according to claim 43, characterized in that the core (8; 8') or at least a part of the cores (8'') is in the form of a liquid contained in a gelatin capsule.

45. Composition according to claim 42, characterized in that the core (8; 8') or at least a part of the cores (8'') is in solid form.

46. Composition according to claim 45, characterized in that the core (8; 8') or at least a part of the cores (8'') has a melting point of more than 35°C.

47. Composition according to claim 46, characterized in that the core (8; 8') or at least a part of the cores (8'') has a melting point between 55 and 70°C.

48. Process for performing a dishwashing cycle in a dishwashing machine, characterized in that a composition according to one of the claims 1 to 47 is added at an appropriate time during the prerinsing cycle or main cleaning cycle to the medium in the dishwashing machine.

49. Process according to claim 48, characterized in that for the case where the basic composition in the form of a tablet is unable following its dissolving in the medium and up to the end of the main cleaning cycle to make available in the medium a concentration of the specific compound which is sufficiently high in order to prevent a substantial dissolving of the envelope and a substantial detachment of the envelope from the core or cores, said adequate concentration of the specific compound is made available by the addition of a further composition, such as e.g. a machine dishwashing agent composition, to the medium of the main cleaning cycle at an appropriate time.

ABSTRACT

Composition for use in a water tank in the kitchen or sanitary sector, characterized by a basic composition essentially evolving its function following addition to a first water filling of the water tank, in the form of a tablet and at least one particle, with at least one core, which comprises at least one substance evolving its function essentially following an at least partial emptying of the first water filling from the water tank and the inflow of fresh water and a covering substantially completely surrounding the core or cores comprising at least one compound, whose solubility increases with decreasing concentration of a specific ion in the surrounding medium, the at least one particle being so arranged in or on the tablet that the surface of the particle or particles is at most only partly in direct contact with the surface of the basic composition surrounding the same and the concentration of the specific ion in the local environment of the particle or particles is sufficiently high up to a substantially complete dissolving of the tablet in order to prevent a substantial dissolving of the covering or a substantial detachment of the covering from the core or cores.



## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COMPOSITION FOR USE IN A DISHWASHING MACHINE, the specification of which:

☐ is attached hereto.

☐ was filed on \_\_\_ as Application Serial No. \_\_\_ and was amended on \_\_\_\_\_.

☒ was described and claimed in PCT International Application No. PCT/TR99/00034 filed on 29 July 1999 and was amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35 United States Code § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>FILING DATE</u>	<u>PRIORITY CLAIMED</u>
Germany	198 34 182.2	29 July 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Frederick H. Rabin, Reg. No. 24,488  
John B. Pegram, Reg. No. 25,198  
Richard P. Ferrara, Reg. No. 30, 632  
Samuel Borodach, Reg. No. 38,388

Andrew N. Parfomak, Reg. No. 32,431  
William J. Hone, Reg. No. 26,739  
Stephan J. Filipek, Reg. No. 33,384  
Chris T. Mizumoto, Reg. No. 42,899

Address all telephone calls to FREDERICK H. RABIN at telephone number (212) 765-5070.

Address all correspondence to FREDERICK H. RABIN, at:

FISH & RICHARDSON P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111

**Combined Declaration and Power of Attorney**

Page 2 of 7 pages  
2

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: GUIDO WAESCHENBACH

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Oakland, New Jersey  
Citizenship: Germany  
Post Office Address: 4 Winding Ridge  
Oakland, New Jersey 07436

Full Name of Inventor: RALF WIEDEMANN

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Griesheim, Germany  
Citizenship: Germany  
Post Office Address: Langgässerweg 10  
64347 Griesheim,  
GERMANY

Full Name of Inventor: ENRIC CARBONELL

Inventor's Signature: Carbonell Date: 28 February 2001

Residence: Barcelona, Spain  
Citizenship: Spain  
Post Office Address: c/Pau Alcover, 39  
E-08017 Barcelona  
SPAIN

Full Name of Inventor : LUDWIG HERTLING

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Biblis, Germany  
Citizenship: German  
Post Office Address: Haydnstrasse 4  
D-68647 Biblis  
GERMANY

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COMPOSITION FOR USE IN A DISHWASHING MACHINE, the specification of which:

☐ is attached hereto.

☐ was filed on \_\_\_ as Application Serial No. \_\_\_ and was amended on \_\_\_\_\_.

☒ was described and claimed in PCT International Application No. PCT/TR99/00034 filed on 29 July 1999 and was amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35 United States Code § 119 of any foreign applications(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

COUNTRY	APPLICATION NO.	FILING DATE	PRIORITY CLAIMED
Germany	198 34 182.2	29 July 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Frederick H. Rabin, Reg. No. 24,488  
John B. Pegram, Reg. No. 25,198  
Richard P. Ferrara, Reg. No. 30, 632  
Samuel Borodach, Reg. No. 38,388

Andrew N. Parfomak, Reg. No. 32,431  
William J. Hone, Reg. No. 26,739  
Stephan J. Filipek, Reg. No. 33,384  
Chris T. Mizumoto, Reg. No. 42,899

Address all telephone calls to FREDERICK H. RABIN at telephone number (212) 765-5070.

Address all correspondence to FREDERICK H. RABIN, at:

FISH & RICHARDSON P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111

**Combined Declaration and Power of Attorney**Page 2 of 7 pages  
2

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: GUIDO WAESCHENBACH

Inventor's Signature: G. Wäschenbach Date: 1 March 2011

Residence: Oakland, New Jersey  
Citizenship: Germany  
Post Office Address: 4 Winding Ridge  
Oakland, New Jersey 07436

Full Name of Inventor: RALF WIEDEMANN

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Griesheim, Germany  
Citizenship: Germany  
Post Office Address: Langgässerweg 10  
64347 Griesheim,  
GERMANY

Full Name of Inventor: ENRIC CARBONELL

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Barcelona, Spain  
Citizenship: Spain  
Post Office Address: c/Pau Alcover, 39  
E-08017 Barcelona  
SPAIN

Full Name of Inventor : LUDWIG HERTLING

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Biblis, Germany  
Citizenship: German  
Post Office Address: Haydnstrasse 4  
D-68647 Biblis  
GERMANY

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COMPOSITION FOR USE IN A DISHWASHING MACHINE, the specification of which:

☐ is attached hereto.

☐ was filed on \_\_\_ as Application Serial No. \_\_\_ and was amended on \_\_\_\_\_.

☒ was described and claimed in PCT International Application No. PCT/TR99/00034 filed on 29 July 1999 and was amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations,  $\S$  1.56.

I hereby claim foreign priority benefits under Title 35 United States Code  $\S$  119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>FILING DATE</u>	<u>PRIORITY CLAIMED</u>
Germany	198 34 182.2	29 July 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

✓ Frederick H. Rabin, Reg. No. 24,488

John B. Pegram, Reg. No. 25,198

Richard P. Ferrara, Reg. No. 30,632

Samuel Borodach, Reg. No. 38,388

Andrew N. Parfomak, Reg. No. 32,431

William J. Hone, Reg. No. 26,739

Stephan J. Filipek, Reg. No. 33,384

Chris T. Mizumoto, Reg. No. 42,899

Address all telephone calls to FREDERICK H. RABIN at telephone number (212) 765-5070.

Address all correspondence to FREDERICK H. RABIN, at:

FISH & RICHARDSON P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111

**Combined Declaration and Power of Attorney**

Page 2 of 3 pages

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

1-00 Full Name of Inventor: GUIDO WAESCHENBACH

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Oakland, New Jersey **NJ**  
Citizenship: Germany  
Post Office Address: 4 Winding Ridge  
Oakland, New Jersey 07436

2-00 Full Name of Inventor: RALE WIEDEMANN

Inventor's Signature: Rale Wiede Date: 12 March 2001

Residence: Griesheim, Germany **DEX**  
Citizenship: Germany  
Post Office Address: Langgässerweg 10  
64347 Griesheim,  
GERMANY

3-00 Full Name of Inventor: ENRIC CARBONELL

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Barcelona, Spain **ESX**  
Citizenship: Spain  
Post Office Address: c/Pau Alcover, 39  
E-08017 Barcelona  
SPAIN

4-00 Full Name of Inventor: LUDWIG HERTLING

Inventor's Signature: Ludwig Hertling Date: 12 March 2001

Residence: Biblis, Germany **DEX**  
Citizenship: German  
Post Office Address: Haydnstrasse 4  
D-68647 Biblis  
GERMANY

**Combined Declaration and Power of Attorney**

Page 3 of 3 pages

5-0 Full Name of Inventor : NATASCHA WOLF (married; new name is DASCHNER)

Inventor's Signature: Natascha Dardner Date: 14. 03. 2001

Residence: Ludwigshafen, Germany DE

Citizenship: German

Post Office Address: Brahmsstrasse 16  
D-67061 Ludwigshafen  
GERMANY